

BOARDWALK



live inspired





NATURAL AND WAVING ALLURE

Airy lightness and undulating waves come together on large-scale glazed porcelain formats that seamlessly transition from floors to walls, from indoor to outdoor living. Boardwalk is perfect for contemporary environments, where the classic and the modern blend to form an enchantingly and natural atmosphere

WARMER SHADES OF MARBLE

We have taken the soft, smooth feel characteristic of some of the warmer shades of marble giving it a contemporary touch and a sophisticated design. Boardwalk's different tones shade into one another and reproduce the intense beauty and strength of natural stone, to create elegant, bright, yet extremely sober looks. Pair the multiple sizes with mosaics, in square and brick patterns, to vastly expand design configurations.









BOARDWALK | GLAZED PORCELAIN TILE

20" x 20"
 13" x 13"
 3 1/4" x 6 1/2"



AJ4B Boardwalk BG
 20" x 20"



AJ38 Boardwalk BG
 13" x 13"



AJ4Y Boardwalk BG
 3 1/4" x 6 1/2"



AJ4C Boardwalk GR
 20" x 20"



AJ39 Boardwalk GR
 13" x 13"



AJ4Z Boardwalk GR
 3 1/4" x 6 1/2"



AJ53 Boardwalk BG
 Mosaic - Square 2" x 2"
 13" x 13"



AJ56 Boardwalk BG
 Mosaic - Brick 1" x 4 1/4"
 13" x 13"



AJ54 Boardwalk GR
 Mosaic - Square 2" x 2"
 13" x 13"



AJ57 Boardwalk GR
 Mosaic - Brick 1" x 4 1/4"
 13" x 13"

20" x 20"
 13" x 13"
 3 1/4" x 6 1/2"



AJ4D Boardwalk MC
 20" x 20"




AJ4A Boardwalk MC
 13" x 13"



AJ52 Boardwalk MC
 3 1/4" x 6 1/2"



AJ55 Boardwalk MC
 Mosaic - Square 2" x 2"
 13" x 13"



AJ58 Boardwalk MC
 Mosaic - Brick 1" x 4 1/4"
 13" x 13"

Decorative Options
 Glass Mosaic face mounted on paper sheets



UJ99 Jive
 Mosaic - Square 5/8" x 5/8"
 13" x 13"



UJAF Jive
 Mosaic - Brick 1 1/4" x 5/8"
 13" x 13"

TRIMS




AJ4L Boardwalk BG Bullnose
AJ4M Boardwalk GR Bullnose
AJ4N Boardwalk MC Bullnose
 3" x 13"

SHADE VARIATIONS

The color and shade of all tiles vary to some degree. This variance can be from piece to piece and can also occur from production run to production run.

American National Standard Specifications for Ceramic Tile (ANSI) has implemented a guide that rates ceramic tile on a five-point scale and ranges from V0 through V4.

Instituting the ANSI's color shade variation guidelines you will reduce customer complaints and sell the unique and individual beauty of each ceramic tile.

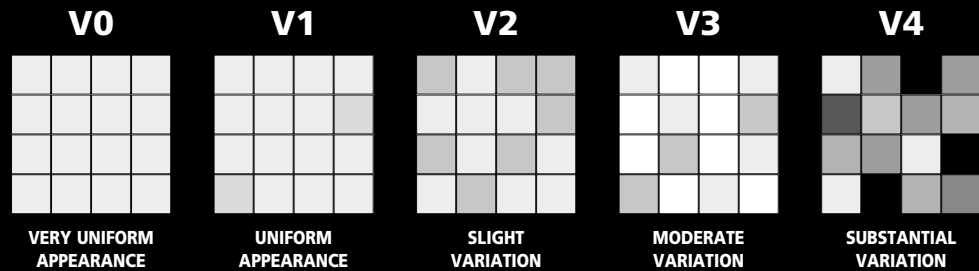

V0 Very Uniform Appearance

Pieces of the same shade value are very uniform and smooth in texture.

V1 Uniform Appearance

Differences among pieces from the same production run are minimal.

V2 Slight Variation

Clearly Distinguishable differences in texture and/or pattern within similar colors.

V3 Moderate Variation

While the colors and/or texture present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

V4 Substantial Variation

Random color and/or texture differences from tile to tile, so that one tile may have totally different colors and/or texture from that on other tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection.

SHADE VARIATION AND APPLICATIONS				
V4 SUBSTANTIAL VARIATION		Residential	Commercial	Industrial
	Floor	•	•	
Wall	•	•	•	
Countertop	•	•	•	
Pool	•	•	•	

Water, oil, grease, or other fluids create slippery conditions. Floors with exposure to these conditions require extra caution in product selection and proper maintenance.

CARE & MAINTENANCE

Boardwalk is a stain-resistant porcelain tile. Routine maintenance will keep your tile looking new for years to come.

Ragno USA's products are typically easy to install and maintain using the following general guidelines:

- Choose tile from same dye lot and caliber whenever possible
- Select tile alternately from several boxes and rotate when installing
- Follow industry-accepted installation practices as detailed by Tile Council of America "Handbook for Ceramic Tile Installation" or those recommended by the Ceramic Tile Institute of America
- Remove all grout residue promptly after application; neither acid cleaning nor sealing is recommended
- Clean regularly with clear water and/or a neutral (soapless) cleaner, wipe dry to lessen slippery conditions

TECHNICAL SPECIFICATIONS

DESCRIPTION	ANSI STANDARD	RESULT	ASTM TEST METHOD	
Water Absorption	≤ 0.50%	≤ 0.50%	C373	
Frost Resistance	As Reported	Resistant	C1026	
Scratch Resistance	MOHS 1-10	7	MOHS SCALE	
Breaking Strength	20"x20"	≥ 250 lbf.	≥ 598 lbf.	C648
	13"x13"	≥ 250 lbf.	≥ 414 lbf.	C648
Facial Dimension	+/- 3.0 % from Nominal	Within Standard	C499	
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499	
Wedging (Squareness)	+/- 0.50 % or 2.0 mm*	Within Standard	C502	
Warp (Flatness)	+/- 0.75 % or 2.3 mm*	Within Standard	C485	
Abrasion Resistance	Class 0 - Class V	Class IV	C1027	
C.O.F. (Wet)	As Reported	0.60 ≤ COF < 0.70	C1028	
C.O.F. (Dry)	As Reported	0.70 ≤ COF < 0.80	C1028	
Chemical Resistance	Class A - Class E	Class A	C650	
Stain Resistance	Class A - Class E	Class A	C1378	

* Whichever is less

PACKAGING

	SIZE	THICKNESS	BOX			PALLET		
			PCS	SQ FT	LBS	BOXES	SQ FT	LBS
Floor Tile	20"x20"	7/16"	06	16.15	84.00	24	387.60	2016.00
Floor Tile	13"x13"	5/16"	13	15.52	60.00	44	682.88	2627.00
Floor Tile	3 ¹ / ₄ "x6 ¹ / ₂ "	5/16"	72	10.55	42.00	51	538.05	2142.00
Mosaic Square - 2"x2"	13"x13"	Compatible	10		39.00			
Mosaic Brick - 1"x4 ¹ / ₄ "	13"x13"	Compatible	10		39.00			
Mosaic Square - 5/8"x5/8"	13"x13"	Compatible	10		29.00			
Mosaic Brick - 1 ¹ / ₄ "x5/8"	13"x13"	Compatible	10		29.00			
Bullnose	3"x13"	Compatible	20		21.00			



Floor Tile



Wall Tile



Decorative Tile



Trim Available



Suitable for Outdoors



Substantial Variation



Frost Resistant



Meets ADA Recommendations



Abrasion Resistance



C.O.F. (Wet)



C.O.F. (Dry)



21% Minimum Pre-Consumer Recycled Content



Certified No VOC



Contributes to LEED Credits



RAGNO  USA

RAGNO USA, Inc.

359 Clay Road
Sunnyvale, TX 75182 USA
Telephone: 972.232.3802
Fax: 972.725.3127
Toll Free: 888.297.2466

E-mail: info@ragnousa.com
Web site: www.ragnousa.com

live inspired

