

STATUS



STATUS

live inspired



EXPRESS YOURSELF

Floor surfaces you create with STATUS are truly a reflection of your own style. Express yourself with a new glazed porcelain in three pure, charming colors. Let your imagination run free and mix STATUS with classic but fashionable furniture design: durable, strong, easy to clean, capable of giving a high touch of warmth and elegance to your house.

STATUS makes a strong statement with its natural and varied surface similar to real stone. It is perfectly suited to residential areas that search for an innovative and long lasting look: anywhere that needs lifting and injecting with a bit of personality.



STATUS | GLAZED PORCELAIN TILE

18"x18"
12"x 12"



AF2D Status BG
18"x18"



AF2A Status BG
12"x12"



AF2E Status MT
18"x18"



AF2B Status MT
12"x12"

18"x18"
12"x12"



AF2F Status NO
18"x18"



AF2C Status NO
12"x12"

TRIMS




AF4L Status BG Bullnose
AF4M Status MT Bullnose
AF4N Status NO Bullnose
3"x12"

SHADE VARIATIONS

The color and shade of all tiles vary to some degree. This variance can be from piece to piece and can also occur from production run to production run.

American National Standard Specifications for Ceramic Tile (ANSI) has implemented a guide that rates ceramic tile on a five-point scale and ranges from V0 through V4.

Instituting the ANSI's color shade variation guidelines you will reduce customer complaints and sell the unique and individual beauty of each ceramic tile.

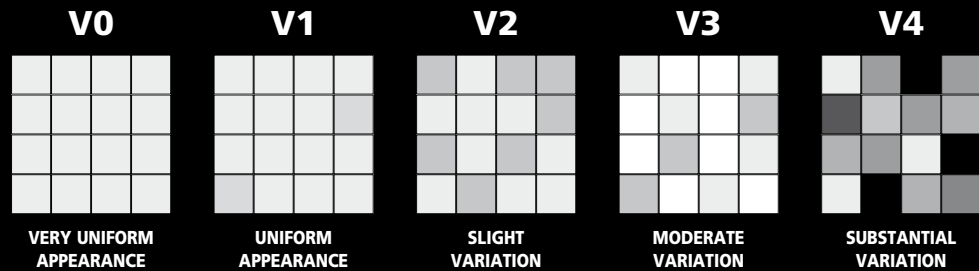

V0 Very Uniform Appearance

Pieces of the same shade value are very uniform and smooth in texture.

V1 Uniform Appearance

Differences among pieces from the same production run are minimal.

V2 Slight Variation

Clearly Distinguishable differences in texture and/or pattern within similar colors.

V3 Moderate Variation

While the colors and/or texture present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

V4 Substantial Variation

Random color and/or texture differences from tile to tile, so that one tile may have totally different colors and/or texture from that on other tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection.

SHADE VARIATION AND APPLICATIONS

V3 MODERATE VARIATION		Residential	Commercial	Industrial
		Floor	•	•
	Wall	•	•	•
	Countertop	•	•	•
	Pool	•	•	•

Water, oil, grease, or other fluids create slippery conditions. Floors with exposure to these conditions require extra caution in product selection and proper maintenance.

CARE & MAINTENANCE

Status is a stain-resistant porcelain tile. Routine maintenance will keep your tile looking new for years to come.

Ragno USA's products are typically easy to install and maintain using the following general guidelines:

- Choose tile from same dye lot and caliber whenever possible
- Select tile alternately from several boxes and rotate when installing
- Follow industry-accepted installation practices as detailed by Tile Council of America "Handbook for Ceramic Tile Installation" or those recommended by the Ceramic Tile Institute of America
- Remove all grout residue promptly after application; neither acid cleaning nor sealing is recommended
- Clean regularly with clear water and/or a neutral (soapless) cleaner, wipe dry to lessen slippery conditions

TECHNICAL SPECIFICATIONS

DESCRIPTION	ANSI STANDARD	RESULT	ASTM TEST METHOD	
Water Absorption	≤ 0.50%	≤ 0.50%	C373	
Frost Resistance	As Reported	Resistant	C1026	
Scratch Resistance	MOHS 1-10	7	MOHS SCALE	
Breaking Strength	18"x18"	≥ 250 lbf.	≥ 467 lbf.	C648
	12"x12"	≥ 250 lbf.	≥ 364 lbf.	C648
Facial Dimension	-3.0 % < Nominal < 3.0 %	Within Standard	C499	
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499	
Wedging (Squareness)	+/- 0.50 % or +/- 2.0 mm*	Within Standard	C502	
Warpage (Flatness)	+/- 0.75 % or +/- 2.3 mm*	Within Standard	C485	
Abrasion Resistance	Class 0 - Class V	Class IV	C1027	
C.O.F. (Wet)	As Reported	0.60 ≤ COF < 0.70	C1028	
C.O.F. (Dry)	As Reported	0.60 ≤ COF < 0.70	C1028	
Chemical Resistance	Class A - Class E	Class A	C650	
Stain Resistance	Class A - Class E	Class A	C1378	

* Whichever is less

PACKAGING

	SIZE	THICKNESS	BOX			PALLET		
			PCS	SQ FT	LBS	BOXES	SQ FT	LBS
Floor Tile	18"x18"	3/8"	07	15.26	64.00	32	488.32	2048.00
Floor Tile	12"x12"	5/16"	15	14.53	51.00	48	697.44	2448.00
Bullnose*	3"x12"	Compatible	20		21.00			

* Trim is available in all colors and made to complement Floor Tile.



Floor Tile



Wall Tile



Trim Available



Suitable for Outdoors



Moderate Variation



Frost Resistant



Meets ADA Recommendations



Abrasion Resistance



C.O.F. (Wet)



C.O.F. (Dry)




7% Minimum Pre-Consumer Recycled Content



Certified No VOC



Contributes to LEED Credits

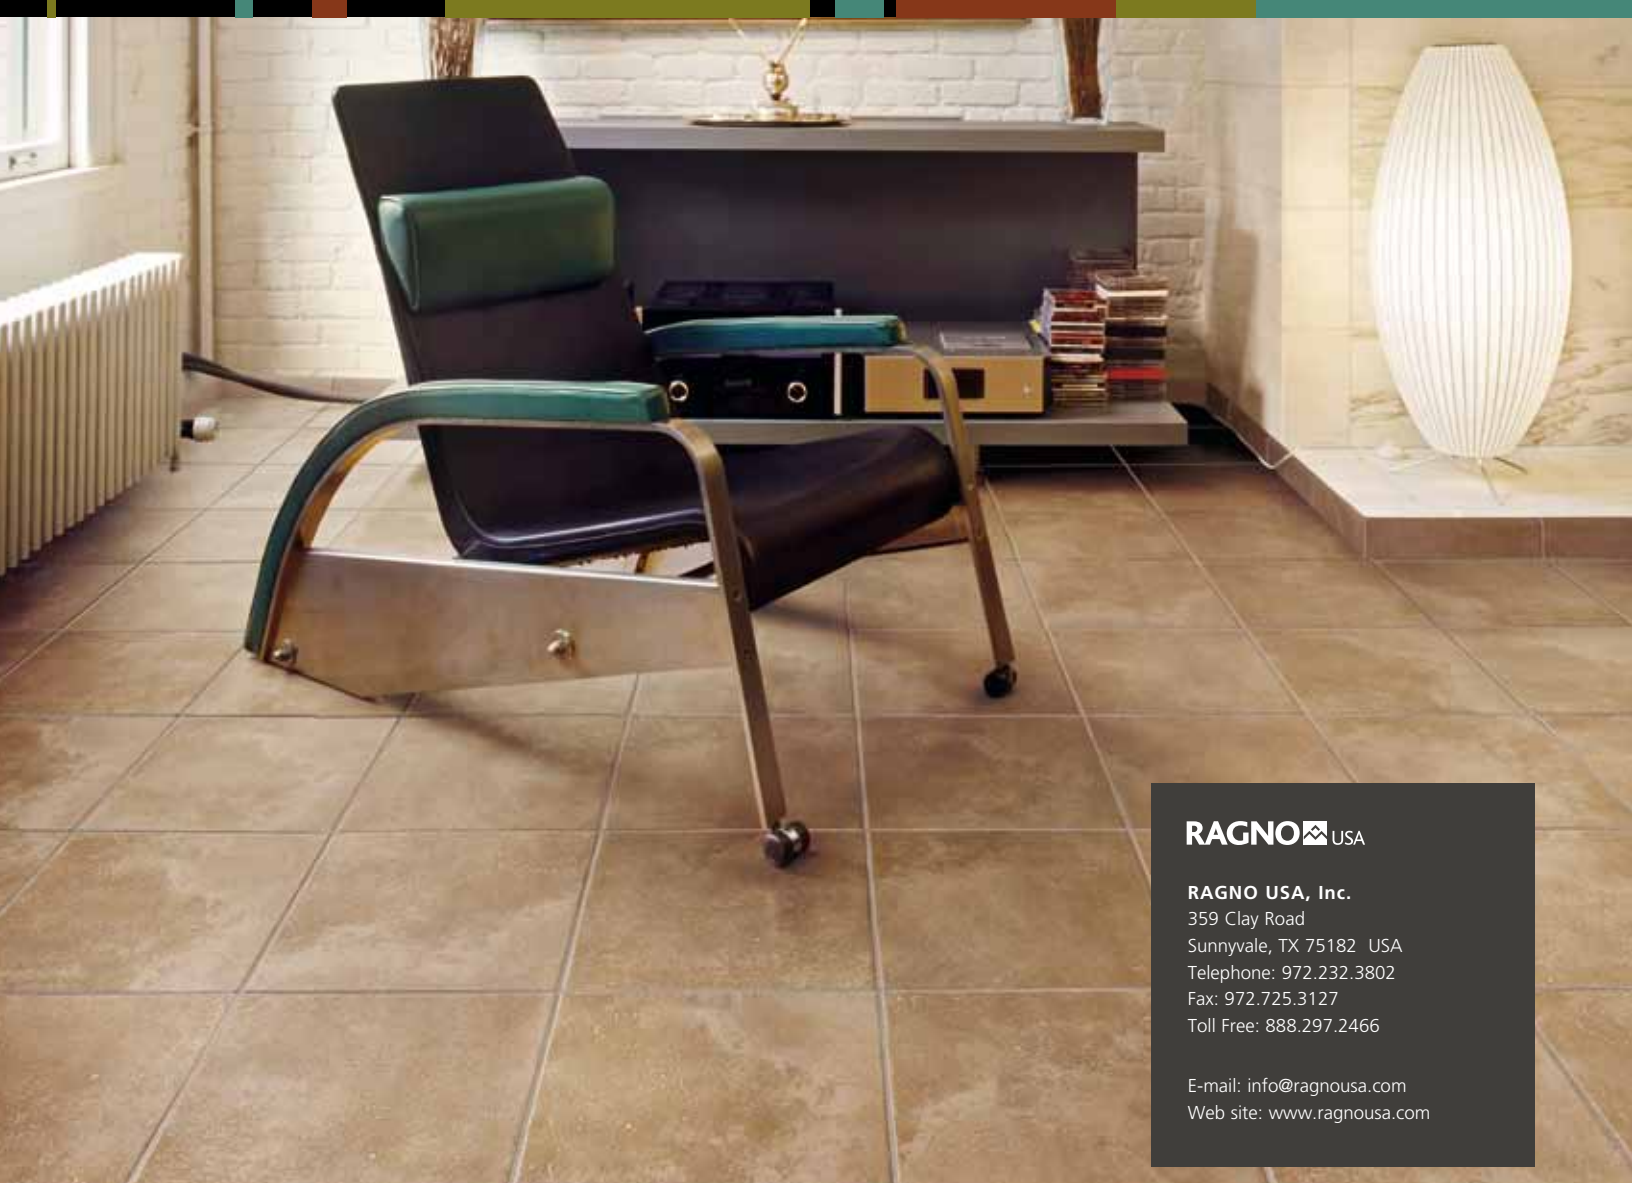

RAGNO  USA

RAGNO USA, Inc.

359 Clay Road
Sunnyvale, TX 75182 USA
Telephone: 972.232.3802
Fax: 972.725.3127
Toll Free: 888.297.2466

E-mail: info@ragnousa.com
Web site: www.ragnousa.com

live inspired

